

ITEM NO		
PROJECT		
LOCATION		
DATE	QTY.	



FLR SERIES

Flavorail Ice Cream Dipping Cabinets

MODELS

- □ FLR-60
- □ FLR-80

FEATURES

CONSTRUCTION

- 20 gauge seamless stainless steel top
- 24 gauge steel cabinet
- Galvanized steel inner liner with copper tube wrap cold wall evaporator
- Anti-condensate heaters under stainless top cap
- 2¹/₄" foamed-in-place "zero ODP" urethane insulation
- Equipped with leveling legs to correct for unlevel flooring situations
- Floor drain with standard garden hose fitting

FINISH

 Sparkling white polyester enamel exterior and galvanized interior

LIDS

- Stainless steel
- Hinged with handles
- Heavy-duty replaceable gasket

REFRIGERATION

- Refrigerant: R-134a
- Self-contained, slide-out, factory tested refrigeration system
- Forced draft hermetic condensing unit with wire and tube condenser for low maintenance

- Temperature range: 0° to -10°F (-18° to -23°C)
- R-factor (insulation efficiency rating): 19.40

WARRANTY

 Standard limited four year extended compressor and one year limited parts and labor


OPTIONS

- ☐ Add suffix "SE" for all stainless exterior
- ☐ Custom colors
- ☐ Pumps and jar assemblies
- ☐ Lid locking kit (less lock)
- ☐ Casters
- □ Legs
- ☐ Individual pumps, jars, hinged jar lids and ladles
- □ Dipper well



TECHNICAL SPECIFICATIONS

	DIMENSIONS (in.)		DIMENSIONS (mm)				UNIT	CAN CAPACITY	САР.	SHIP	SHIP WT.		
MODEL	L	D	Н	L	D	Н	VOLTS	AMPS	H.P.	DISPLAY/STORAGE*	CU. FT.	CU. FT.	LB/KG
FLR-60	43	301/8	381/4	1092	765	972	115	5.7	1/4	5/7	12.5	46.0	300/136
FLR-80	54	301/8	381/4	1372	765	972	115	7.3	1/3	6/11	16.8	57.0	340/155

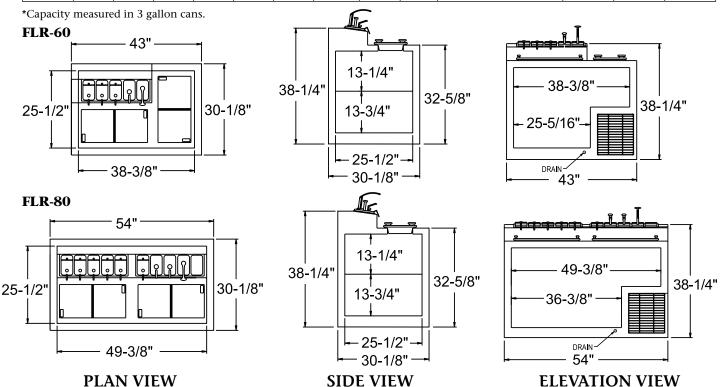

Note: Pumps, jars and spoons are not included in the base model.

LISTINGS



HOOKUP

Via plug in, 8 foot long, flexible 3 wire 14/3 cord with molded plug. 15 amp service is recommended.



BID SPECIFICATIONS

Item no. FLR-Provide_ Ice Cream Dipping Cabinet(s), Master-Bilt model no. FLR-

Cabinet to have anti-condensate heaters under stainless top cap, 21/4" foamed-in-

place "zero ODP" urethane insulation and stainless steel lids hinged with handles. Standard leveling legs provided to correct for unlevel flooring situations.

The refrigeration system is to be selfcontained and use R-134a refrigerant. The temperature range will be 0° to -10°F (-18° to -23°C). Cabinet to have standard limited four year extended compressor warranty and one year limited parts and labor warranty. Cabinet to be UL, C-UL and NSF listed.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.



908 Highway 15 North • New Albany, MS 38652

PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com